

Flatbed Trailers • Dual Tandem



Optional Features on all Flatbeds

- Available axle sizes: 6K, 7K, 8K, 9K, 10K GD, 10K HD, 12K • Jack options: Extra drop jack, 2-speed double jacks or 2-speed double jacks with drop legs • Center ramp • 8K axles - includes 17.5" H-rated tires (single wheel flatbeds only) • Tri-axle (6K or 7K axles only) • Electric/hydraulic brakes • Tool box lid • Tread plate floor
- Expanded metal in gooseneck • Stand-up ramp brackets • Cross members on 16" or 12" centers • Torque tube (required on 9K-12K trailers, length 30' or greater)
- Winch plate

Available Colors



Red Black


SPECIFICATIONS	GAWR	GVWR	Curb wt.*	Payload**	Length	Width	Axle type	Frame Size	CM centers	Brakes
16'+5' 10K GD	10,000	20,000	5,700	18,300	16'+5' dove	102"	Spring	19#/foot	16"	Elec/12.25"x3.375"
20'+5' 10K GD	10,000	20,000	6,200	17,800	20'+5' dove	102"	Spring	19#/foot	16"	Elec/12.25"x3.375"
25'+5' 10K GD	10,000	20,000	6,700	17,300	25'+5' dove	102"	Spring	22#/foot	16"	Elec/12.25"x3.375"
30'+5' 10K GD	10,000	20,000	7,250	16,750	30'+5' dove	102"	Spring	22#/foot	16"	Elec/12.25"x3.375"
16'+5' 10K HD	10,000	20,000	5,800	18,200	16'+5' dove	102"	Spring	19#/foot	16"	Elec/12.25"x4"
20'+5' 10K HD	10,000	20,000	6,200	17,800	20'+5' dove	102"	Spring	19#/foot	16"	Elec/12.25"x4"
25'+5' 10K HD	10,000	20,000	6,700	17,300	25'+5' dove	102"	Spring	22#/foot	16"	Elec/12.25"x4"
30'+5' 10K HD	10,000	20,000	8,160	15,840	30'+5' dove	102"	Spring	22#/foot	16"	Elec/12.25"x4"
16'+5' 12K	12,000	24,000	6,100	22,700	16'+5' dove	102"	Spring	22#/foot	16"	Elec/12.25"x5"
20'+5' 12K	12,000	24,000	6,600	22,200	20'+5' dove	102"	Spring	22#/foot	16"	Elec/12.25"x5"
25'+5' 12K	12,000	24,000	6,900	21,900	25'+5' dove	102"	Spring	26#/foot	16"	Elec/12.25"x5"
30'+5' 12K	12,000	24,000	9,260	19,540	30'+5' dove	102"	Spring	26#/foot	16"	Elec/12.25"x5"

Payload is based on a Gooseneck trailer.

optional dovetail lifting mechanism



spring loaded, double hinged ramps

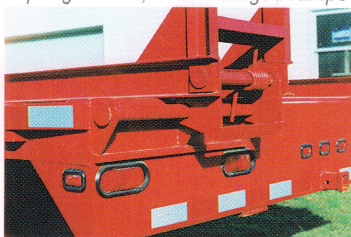

wedge ramps standard on fixed tail



standard front chain tray





Standard Features on all Flatbeds

- Dexter axles • Available axle sizes: 6K, 7K, 8K, 9K, 10K GD, 10K HD, 12K • 8 1/2' wide • Name brand radial tires • Electric brakes on both axles • #1 treated pine floor (kiln dried after treatment) • Bulldog® 10,000 lb. drop leg jack • Front chain basket • Stake pockets 100% welded on both sides • 2" x 3/8" rub rail
- 8" channel bulkhead with two D-rings • Spring assist ramps • Special silicone filled electric connectors
- Breakaway kit with 12-volt battery • Shot blasted before painting • Two front steps • Shot blasted, primed, then painted

SPECIFICATIONS	GAWR	GVWR	Curb wt.*	Payload**	Length	Width	Axle type	Frame Size	CM centers	Brakes
16+5 7K	7,000	14,000	4,200	12,600	16'+5' dove	102"	Torsion	10" I-beam 12#/ft	24"	Elec/12"x2"
18+5 7K	7,000	14,000	4,400	12,400	18'+5' dove	102"	Torsion	10" I-beam 12#/ft	24"	Elec/12"x2"
20+5 7K	7,000	14,000	4,500	12,300	20'+5' dove	102"	Torsion	10" I-beam 12#/ft	24"	Elec/12"x2"
22+5 7K	7,000	14,000	4,700	12,100	22'+5' dove	102"	Torsion	10" I-beam 15#/ft	24"	Elec/12"x2"
24+5 7K	7,000	14,000	4,900	11,900	24'+5' dove	102"	Torsion	10" I-beam 15#/ft	24"	Elec/12"x2"
25+5 7K	7,000	14,000	5,000	11,800	25'+5' dove	102"	Torsion	10" I-beam 15#/ft	24"	Elec/12"x2"
26+5 7K	7,000	14,000	5,200	11,600	26'+5' dove	102"	Torsion	10" I-beam 15#/ft	24"	Elec/12"x2"
28+5 7K	7,000	14,000	5,300	11,500	28'+5' dove	102"	Torsion	10" I-beam 15#/ft	24"	Elec/12"x2"
30+5 7K	7,000	14,000	5,500	11,300	30'+5' dove	102"	Torsion	10" I-beam 15#/ft	24"	Elec/12"x2"

Payload is based on a Gooseneck trailer.

Dovetail options



Fixed Dovetail (standard)



Center Lift Dovetail



Adjustable Dovetail

Optional lifting mechanisms

- Dovetail jack
- Dovetail lifting mechanism with driver side crank

optional front tool box lid



2-speed double jacks, with drop legs



optional center ramp



available as a tag model

